



### ▲ 产品规格 Specifications



型号 Type	连接螺纹 Link-screwthread	工作压力 (MPa) Working Pressure	环境温度 Ambient Temperature	介质温度 Medium Temperature	有效截面积 Effective sectional area	寿命 (万次) Longevity(Myriad times)
K23R5-L6	M10x1 (G1/8")	0.05~0.8	-5~40	-5~50	20	≥200
K23R5-L8	M12x1.25 (G1/4")				10	
K23R5-L0	M16x1.5 (G1/2")				60	≥150
K23R5-L5	M20x1.5 (G1/2")				40	
K25R5-L6	M10x1 (G1/8")				20	≥200
K25R5-L8	M12x1.25 (G3/8")				10	
K25R5-L10	M16x1.5 (G3/8")				60	≥150
K25R5-L15	M20x1.5 (G1/2")				40	
K34R5-L6	M10x1 (G1/4")				20	≥200
K34R5-L8	M12x1.25 (G1/8")				10	

### 图形符号 Symbol

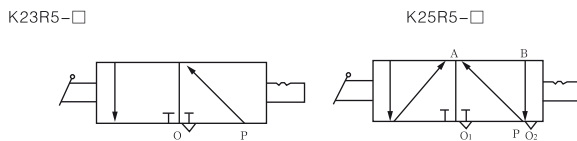

### ▲ 订购码 Order Code

