


▲ 产品规格 Specifications

缸径(mm) Bore	32	40	50	63	80	100	125	160	200
动作型式 Action model	双动型 Double Action								
工作介质 Working Fluid	空气 Air								
固定型式 Mounting Type	基本型 FA型 LB型 TC型 TC-M型 Basis stype FA type LB type TC type TC-M type								
工作压力MPa Working Pressure MPa	0.1—0.9MPa								
耐压MPa Proof Working MPa	1.5MPa								
工作温度℃ Working temperature℃	0 ~ 60								
工作速度mm / s Working speed range mm / s	50 ~ 800						50—500		
缓冲型式 Cushion Type	可调缓冲 Adjustable Cushion								
缓冲行程mm Cushion stroke mm	24				32				
接管口径 Port Size	PT1 / 8	PT1 / 4	PT3 / 8	PT1 / 2	PT3 / 4				



图形符号 Symbol



▲ 行程 Stroke

缸径(mm) Bore	标准行程 Standard Stroke	最大行程 Max Stroke	容许行程 Stroke Tolerance
32	25 50 75 80 100 125 150 160 175 200	200	300
40	25 50 75 80 100 125 150 160 175 200	200	300
50	25 50 75 80 100 125 150 160 175 200	200	300
63	25 50 75 80 100 125 150 160 175 200	200	300
80	25 50 75 80 100 125 150 160 175 200 250 300	300	400
100	25 50 75 80 100 125 150 160 175 200 250 300	300	400
125	25 50 75 80 100 125 150 160 175 200 250 300 350 400 450 500 600	800	1000
160	25 50 75 80 100 125 150 160 175 200 250 300 350 400 450 500 600 700 800 900 1000	1000	1500
200	25 50 75 80 100 125 150 160 175 200 250 300 350 400 450 500 600 700 800 900 1000	1000	1500

▲ 订购码 Order Code

HYCJ-63x100-25-S-LB

固定型式 mounting style

磁环代号 Magnet Code

调整行程 Adjustable stroke

行程 Stroke

缸径 Bore

型号 Type

(空白) Blank

LB

FA

FB

CA

CB

TC

TC-M

适用于 For ø40~ø100

S: 附磁环
空白: 不附磁
S: With Magnet
Blank: without magnet

25: 25mm
50: 50mm
75: 75mm

—HYC: 双轴双动可调型(拉杆式)(f32 ~ f200)
—HYC: Standard double action(Tie rod style)(f32 ~ f200)
—HYU: 米字型缸筒双动可调型(f32 ~ f100)
—HYU: Cylinder tube shape is '米'(f32 ~ f100)

※特殊行程请与本公司联系
※Special stroke contact us

▲ 举例 Typical Example

1)欲订购缸径为63mm,行程为200mm,调整行程为30mm,附磁环,采用LB固定型式的双轴复动可调型(拉杆式)气缸,其正确的订购码代号为:SCJ-63×200-S-LB。


2)欲订购缸径为50mm,行程为150mm,调整行程为30mm,不附磁环,采用FA固定型式的双轴复动型(拉杆式)气缸,其正确的订购码代号为:SCJ-50×150-30-FA。

1)Model:SCJ-63×200-30-S-LB Bore:63mm Stroke:200mm with magnet Adjustable stroke 30mm Type:Double rod, double action,adjustable stroke(tie rod)Mounting:LB style.

2)Model:SCJ-50×150-30-FA Bore: 50mm strock 150mm, without mangct, Adjustable strok:30mm type:Double rod,double action,adjustable stroke(tie rod)Mounting:FA style.

▲ 内部结构 Internal Structure

不附磁 Without magnet

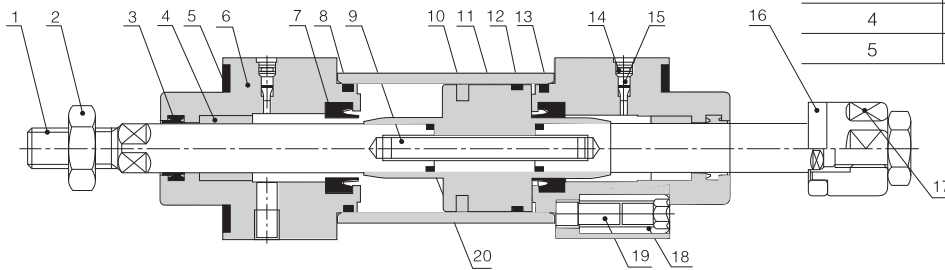

序号No.	名称	Part name
1	活塞杆Piston rod	
2	螺母 Nut	
3	前盖密封圈Rod packing	
4	含油轴承 Bush	
5	防护盖板	

序号No.	名称	Part name	序号No.	名称	Part name	序号No.	名称	Part name
6	前盖 Rod cover		11	活塞 Piston		16	可调螺帽垫片 Adjustable nut washer	
7	缓冲密封圈Cushion packing		12	耐磨环 Wear ring		17	可调螺帽 Adjustable nut	
8	管壁O形圈Cover gasket		13	缸筒 Cylinder tube		18	拉杆螺帽 Tie nut	
9	连接螺栓 Bolt		14	缓冲防漏O形圈Cushion "O" ring		19	拉杆 Tie rod	
10	活塞双O形圈Piston seal		15	缓冲调整螺钉cushion needle		20	活塞杆O形圈Piston rod"O"ring	

缸径(mm)Bore	32	40	50	63	80	100	125	160	200
本体 Body	铝合金Aluminum alloy				低碳钢 Steel				
活塞 Piston	铝合金Aluminum alloy				铸铁Castiron				
活塞杆 Piston rod	高碳钢(镀硬铬研磨处理)Steel(Industrial chrome plated)								
前盖密封圈 Rod packing	NBR								
活塞双O形圈 Piston seal	NBR								
管壁O形圈 Cover gasket	NBR								
活塞杆O形圈 rod "O" ring	NBR								
缓冲密封圈 Cushion packing	NBR								
防漏O形圈 Cushion "O" ring	NBR								
含油轴承 Bush	含油粉末冶铜Oil impregnated bearing alloy								
前盖Rod cover	铝合金Aluminum alloy				铸铁Castiron				
磁铁 magnet	塑胶Plastic magnet								

缸径(mm)Bore	32	40	50	63	80	100	125	160	200
LB支架 LB bracket	低碳钢		Steel						
FA支架FA bracket	中碳钢		Steel						
TC支架 TC bracket	铸铁		Cast iron						
TC脚座 TC bracket	铸铁		Cast iron						
连接螺栓 Bolt	中碳钢		Steel						
可调螺帽 Adjustable nut	快削铁		Pare iron quickly						
可调螺帽垫片 Adjustable nut washer	工程塑钢		Project plastic steel						
拉杆 Tie rod	低碳钢		Steel						
拉杆螺帽Tie nut	低碳钢		Steel						
耐磨环 Wear ring	F4cu								
缓冲螺钉Cushion needle	铜		Copper						

B
HYC
HYCD
HYCJ
HYCT
HYC
MBB
QGA(B)
CA1
CS1
DNC
SDA
SDAD
SDAJ
SDAT
SDAW
SDA
CQS
CQ2
ADVU
MAL
MSAL
MALD
MALJ
MAL
MA MAC
MSA
MAD
MAJ
MAR
MA
CJ2
CM2
DSNU
CU
TN
CXS
CXSW
MGP
CJP
CY1B(S)
MH
ZH